


PFT CUTMASTER 1300/310

The hot wires for rational application of insulation panels


Quickly. Comfortably. Accurate to the millimetre. The PFT CUTMASTER is reduced in the construction to the bare essentials. But for the fast, clean and precise workflow the CUTMASTER has everything.

TECHNICAL DATA

Part no.	00 29 30 72
Cutting height	1,350 mm
Cutting depth on 90 degree	310 mm
Mitre cuts laterally	Cutting bow on the left side tilting to 45° angle
Cutting bows	Made by aluminium with integrates push button
Stand base	Folding, freestanding working with third removeable feet
Aluminium support angle lenght: left/right	980 / 400 mm - including longitudinal scale
Base plae	Multi-layer board coated - water resistant
Transformer	Primary 230 V, 50 Hz Secondary 28 V, power 150 VA - protection against splashing water
Twice fuse protection transformer - safe and powerful	High cutting speed and a short heating time
Dimension for transport: D/W/H	190 / 700 / 1,570 mm
Total weight	~ 16,5 kg



ADVANTAGES AT A GLANCE

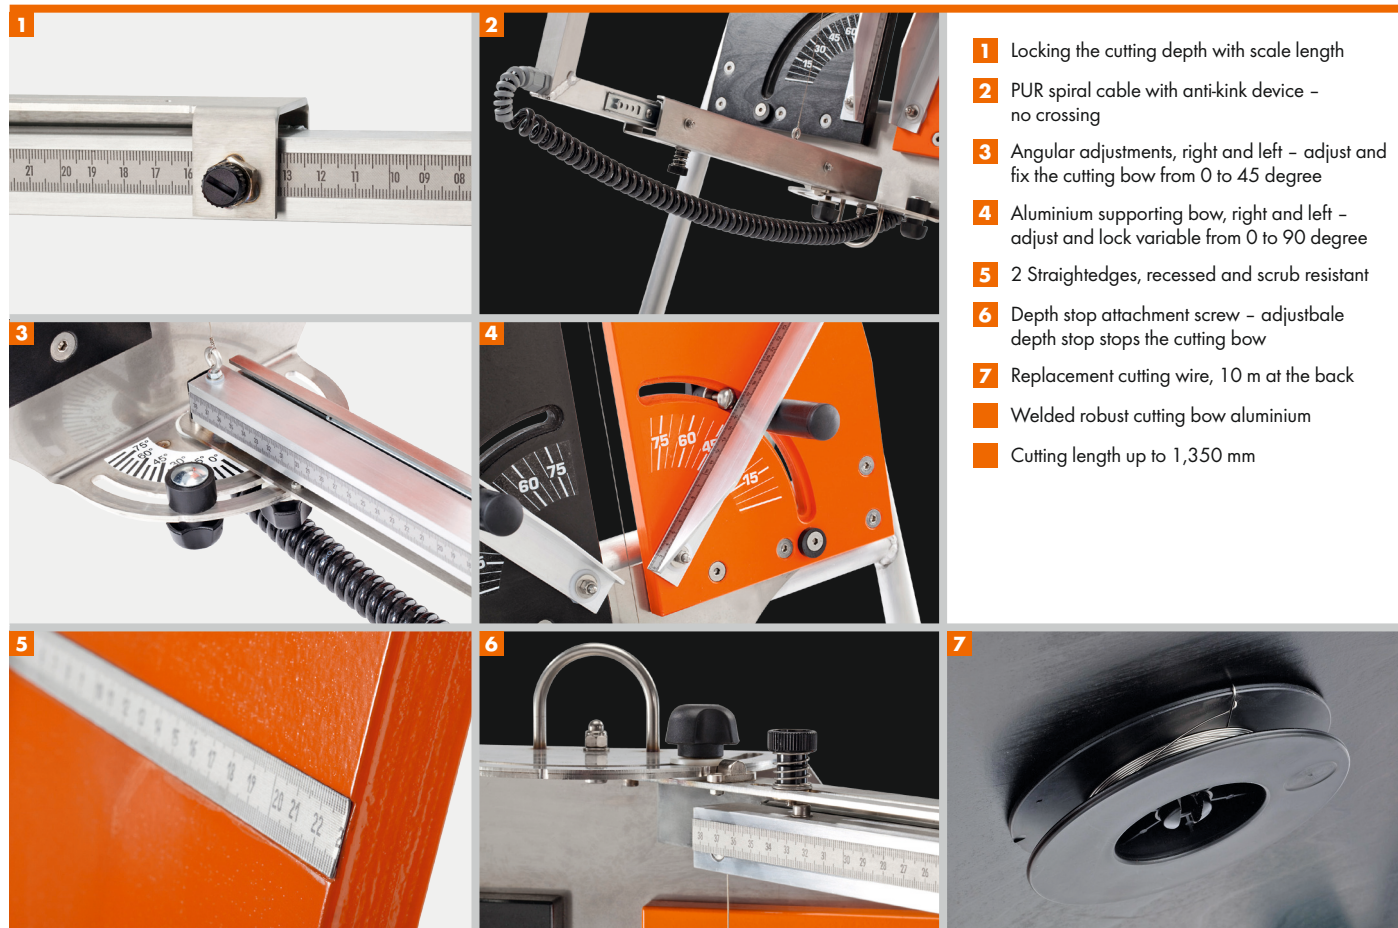

- 1** Locking the cutting depth with scale length
- 2** PUR spiral cable with anti-kink device – no crossing
- 3** Angular adjustments, right and left – adjust and fix the cutting bow from 0 to 45 degree
- 4** Aluminium supporting bow, right and left – adjust and lock variable from 0 to 90 degree
- 5** 2 Straightedges, recessed and scrub resistant
- 6** Depth stop attachment screw – adjustable depth stop stops the cutting bow
- 7** Replacement cutting wire, 10 m at the back
- Welded robust cutting bow aluminium
- Cutting length up to 1,350 mm

FIELDS OF APPLICATION

- Heat insulation of the complete interior and exterior sector
- Perfect insulation of the facade, even in difficult places, e. g. under the eaves or window ledges



ACCESSORIES

- Support for scaffold PFT CUTMASTER Holding device allows a quick attachment of the polystyrene cutter on the scaffold
- Transport case
- PFT CUTMASTER 1300/310 with transport case
- PFT CUTMASTER 1300/310 – 110V

PART NO.

00 27 13 58
00 41 89 90
00 40 20 71
00 41 66 17



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.eu
www.youtube.com/knaufpften

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft-iphofen.de www.pft.eu

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT CUTMASTER 1300/310 – GB/02.16/PFT