


DESIGNPANEL TANGENT T3L1 900 x 2400


PERFORERINGSDETALJER

Perforeringstype	Tangent - 4x14 mm ovale huller
Perforeringsprocent	15,8 %
Perforeringsmønster	T3L1

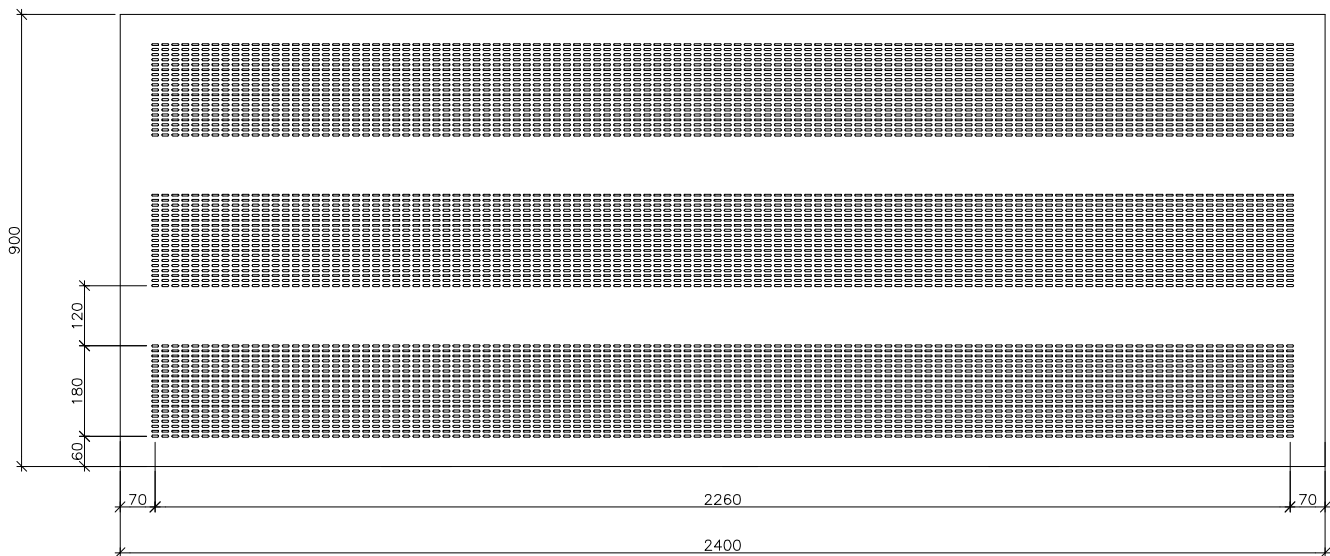

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,60	0,70	0,70	0,65	0,65	0,70

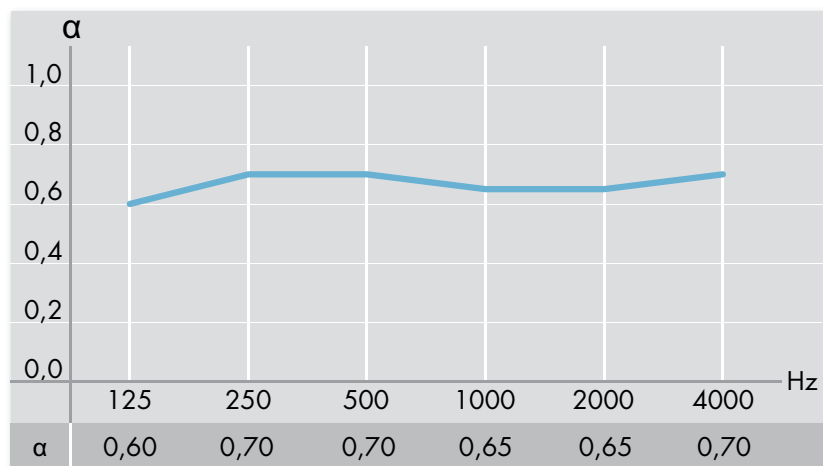


Ved 200 mm og med 50 mm mineraluld

DESIGNPANEL TANGENT T3L2 900 x 2400


PERFORERINGSDETALJER

Perforeringstype	Tangent - 4x14 mm ovale huller
Perforeringsprocent	15,0 %
Perforeringsmønster	T3L2

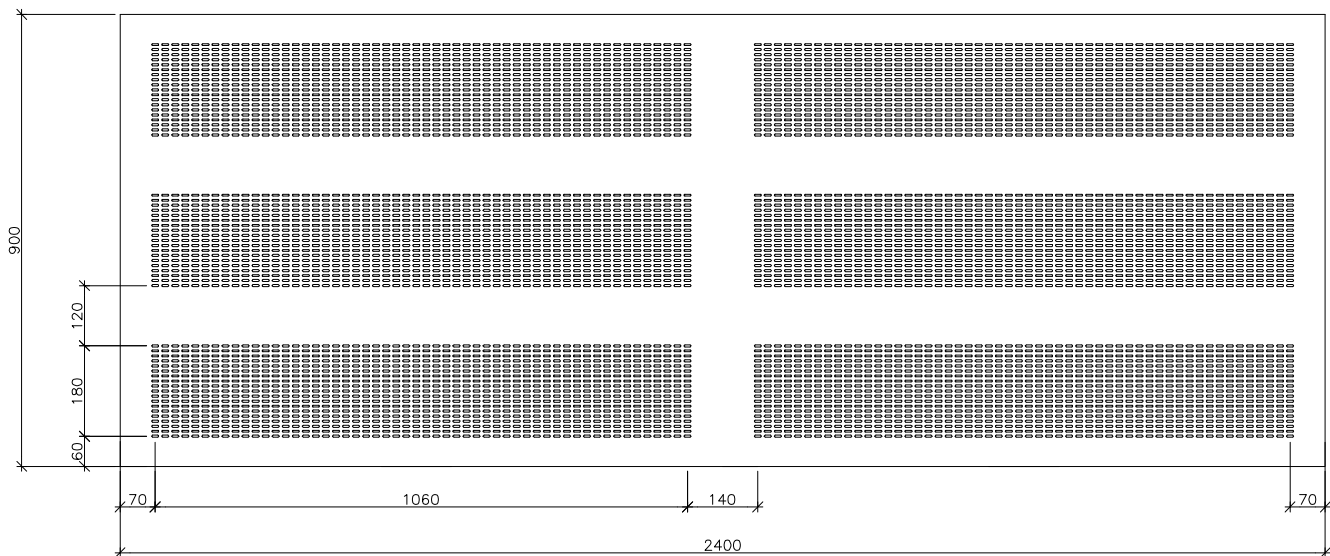

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,60	0,65	0,65	0,60	0,60	0,65

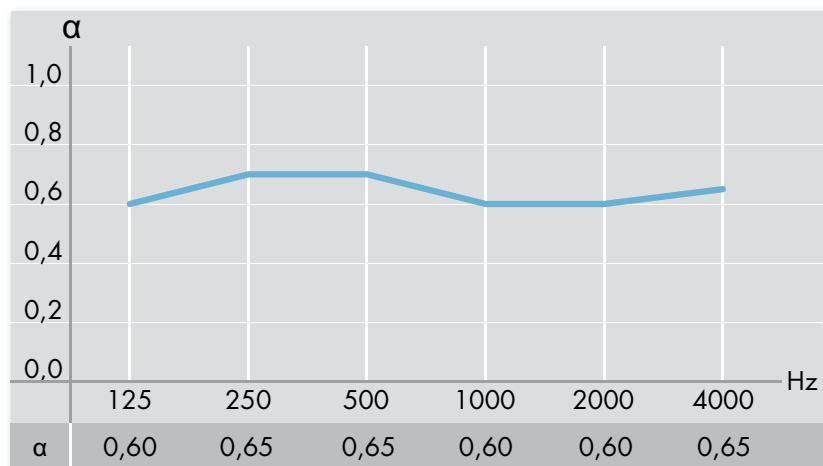


Ved 200 mm og med 50 mm mineraluld

DESIGNPANEL TANGENT T3L4 900 x 2400


PERFORERINGSDETAJER

Perforeringstype	Tangent - 4x14 mm ovale huller
Perforeringsprocent	13,3 %
Perforeringsmønster	T3L4

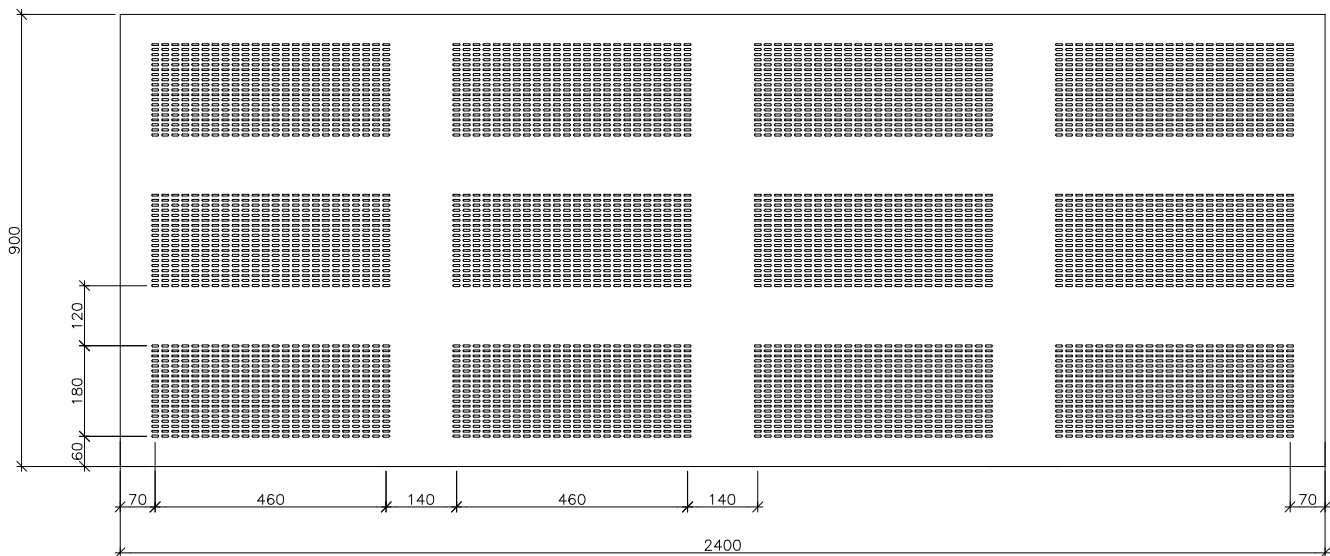

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,60	0,55	0,50	0,55	0,55

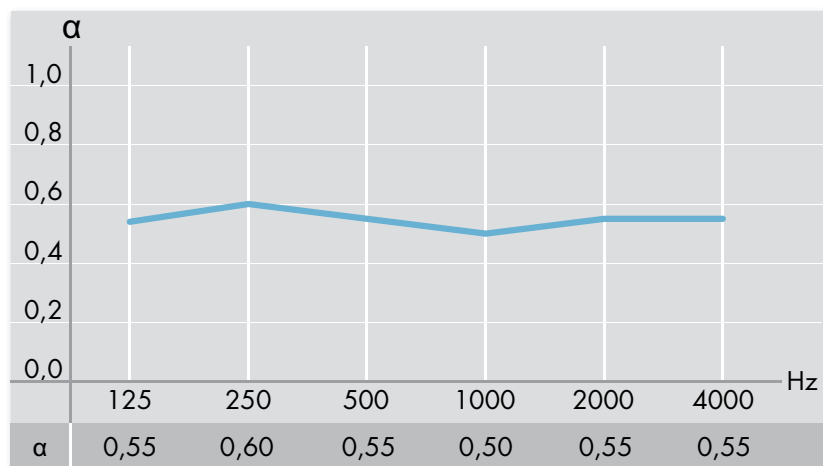

Ved 200 mm og med 50 mm mineraluld