

PFT SWING L FC-400V

The universal conveying pump for pumping, applying and spraying


For the application of all pumpable lime- and cement-based ready-mixed dry mortars, wet materials, pasty materials and liquid medias. In combination with an air compressor and spraying gun, the PFT SWING L can also be used for the application of plasters and paints.

TECHNICAL DATA


Part no.	00 17 84 15
Maximum working pressure	30 bar
Maximum conveying capacity	continuously variable conveying output of 4 – 90 l/min
Maximum conveying distance	up to 50 m
Motor	400 V, 3 Ph, 50 Hz, 5.5 kW, 135 – 448 rpm
Hopper content	76 litre
Rotor / Stator	TWISTER D 6-3
Material outflow	DN35 female part
Coupling reduce	DN35 female part DN25 male part
Material hopper	Plastic
Wheels	2 castors, 2 wheels
Dimensions: L/W/H	1.600 / 600 / 660 mm
Filling height	610 mm
Total weight	~ 133 kg

Kindly note:

Conveying distance depends on the used materials.



ADVANTAGES AT A GLANCE

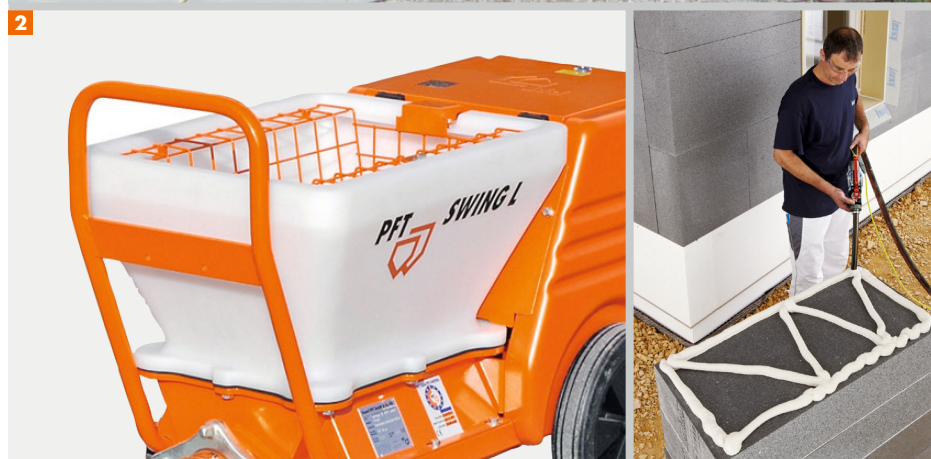

- 1** Fits easily under each mixer
- 2** Plastic material hopper – easy cleaning
- Variable conveying output through pump change (D or R pump)
- Pump performance continuously adjustable via potentiometer
- Universal filling from buckets or continuous mixers
- Handy and compact
- Fast cleaning and maintenance
- Transport is possible in any estate car without dismantling
- High conveying output and conveying distance

FIELDS OF APPLICATION

- Adhesive and reinforcement mortar
- Finishing coat
- Insulation mortar
- Floor fillers
- Fine filler
- Masonry mortar
- Floor screed up to 60 l/min

ACCESSORIES

- Extension cable 3 x 2,5 mm², BLU 2-16 A – 25 m
- Remote control cable with switch – 25 m
- Safety grille, low – required for continuous mixer
- Bag squeezer for SWING L
- Water hose Geka / Geka DN12 – 5 m
- Nozzle Geka DN19

PART NO.

- 20 42 34 00
- 20 45 69 29
- 00 25 30 76
- 00 20 15 64
- 20 21 11 00
- 20 21 57 00



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.eu
www.youtube.com/knaufpft

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft-iphofen.de www.pft.eu

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT SWING L FC-400V – GB/02.16/PFT