

PFT FERro

The machine combination made by PFT - for the improved application of floor screed



The machine combination PFT FERro is a continuously working mixing and conveying pump for the application of floor screed. It fully automatically transports all ready mixed floor screeds from a silo/container. After addition of water in the mixing tube the material flows into the hopper of the conveying pump via a horizontal mixer that is equipped with a separate drive unit. From there the material is conveyed to the point of application with a capacity of up to 100 l/min.

coming
soon




TECHNICAL DATA

Conveying capacity	approx. 100 l/min
Conveying pressure	max. 25 bar
Conveying distance	up to 100 m with DN50
Engine power pump	Drive: 7,5 kW
Engine power mixer	Drive: 4,0 kW Speed: 280 rpm
Power connection	Three-phase current: 400 V, 32 A Fuse: 25 A Electrical supply: 5 x 4 mm ²
Water	Water connection: 3/4" Water demand: depending on material Water supply pressure min. 2.5 bar
Rotor/Stator	FERRO
Container / silo connection	Ø 350 mm
Dimensions: L/W/H	approx. 2,000/1,850/1,300 mm
Total weight	653 kg

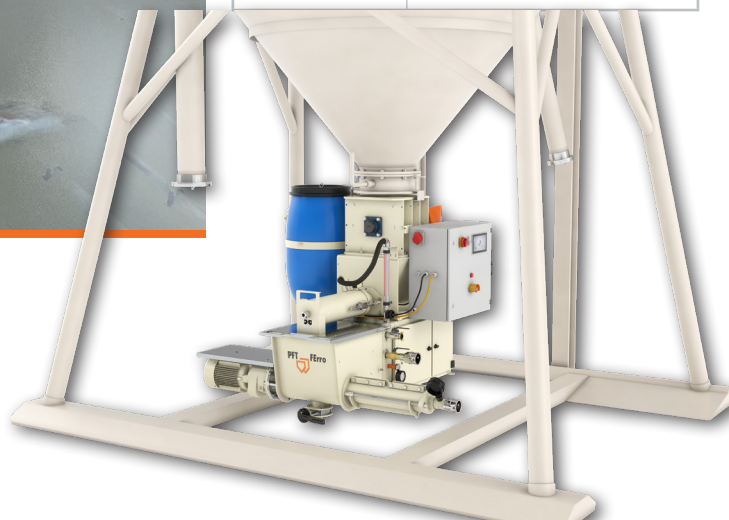

PFT – ALWAYS AT YOUR SITE

ADVANTAGES AT A GLANCE

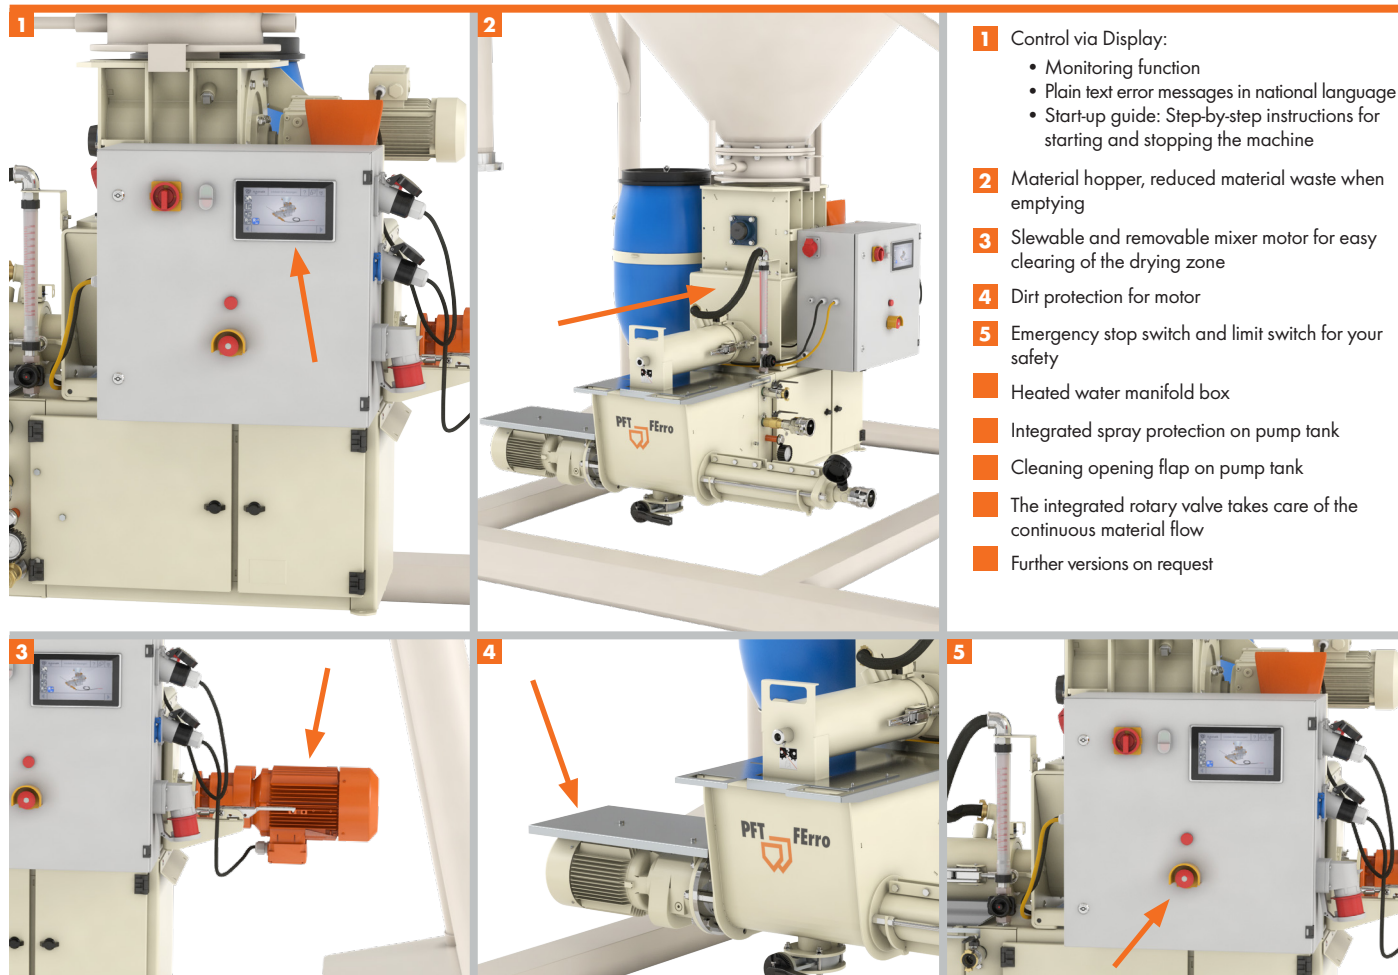

- 1** Control via Display:
 - Monitoring function
 - Plain text error messages in national language
 - Start-up guide: Step-by-step instructions for starting and stopping the machine
- 2** Material hopper, reduced material waste when emptying
- 3** Slewable and removable mixer motor for easy clearing of the drying zone
- 4** Dirt protection for motor
- 5** Emergency stop switch and limit switch for your safety
- Heated water manifold box
- Integrated spray protection on pump tank
- Cleaning opening flap on pump tank
- The integrated rotary valve takes care of the continuous material flow
- Further versions on request

FIELDS OF APPLICATION

- Floor applications



ACCESSORIES

- | | |
|---|-------------|
| ■ External vibrator A-10, 400 V, 50 Hz | 00 12 86 09 |
| ■ Remote control cable with switch on cable drum - 50 m | 20 45 69 16 |

PART NO.

The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpft

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT FERro – EN/03.19/PFT