

# PFT LOTUS XS

## The small, handy and economic continuous mixer


The PFT LOTUS XS is suitable for all dry mortars up to a grain size of 4 mm. For everybody, who like to mix efficient and in a high-quality – in PFT quality for a special price!



### TECHNICAL DATA

Part no.	00 24 60 57
Conveying capacity	max. 20 litre / min
Motor	230 V, 1 Ph, 50 Hz, 1.3 kW, 280 rpm
Mixing tube	Steel mixing tube
Wheels	2 wheels
Water connection	Geka DN12 – 2.5 bar operating pressure
Operation and control	Start / stop
Hopper content	50 litre
Dimensions: L/W/H	1,240 / 635 / 975 – 1,115 mm
Filling height	975 – 1,115 mm, height-adjustable
Outlet depth	535 – 675 mm, adjustable
Total weight	~ 66 kg

**Kindly note:**  
Conveying capacity depends on the used materials.

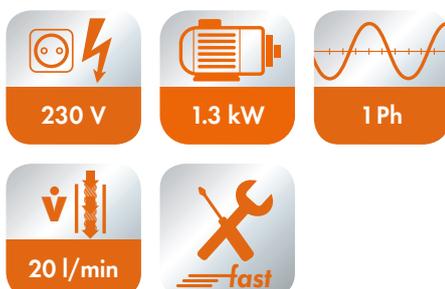

**PFT – ALWAYS AT YOUR SITE**

## ADVANTAGES AT A GLANCE



- 1** Optional water flow meter – retrofitting kit for all LOTUS XS models
- 2** Transport is possible in any estate car
- 3** Removable legs
- 4** Convenience transport – handle on mixing tube
- 5** Water fitting with pressure reducer
- Bagged material mixer
- Easy handling
- Minimal maintenance and cleaning effort
- Reach-in protected grout outlet
- Constant mixing quality
- Adjustable filling height and adjustable legs
- Conveying pump, mortar bucket or wheelbarrow can be easily push underneath



### FIELDS OF APPLICATION

- Tilling and jointing mortar
- Light masonry and masonry mortar
- Adhesive and reinforcement mortar
- Levelling compound
- Scratch render
- Restoration render
- Fine render

### ACCESSORIES

- Extension cable 3 x 2,5 mm<sup>2</sup>, BLU 2-16 A – 25 m
- Water hose DN19 Geka | Geka – 40 m
- Nozzle DN19 Geka
- Retrofitting kit water flow meter 100-1.000 l/h
- PFT TROLLEY – tipping trolley
- Mixing shaft LOTUS XS, filling plaster
- Mortar outlet LOTUS XS with holes, tang

### PART NO.

- 20 42 34 00
- 20 21 21 00
- 20 21 57 00
- 00 51 47 63
- 00 53 56 99
- 00 47 94 11
- 00 58 24 29



### The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

[www.pft.net](http://www.pft.net)  
[www.youtube.com/knaufpft](http://www.youtube.com/knaufpft)

Download now! APP: PFT – Plastering Technology

### Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net [www.pft.net](http://www.pft.net)

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT LOTUS XS – EN/06.19/PFT