

PFT G 4 FC-230/400V

The flexible: Elaborate details – unbeatable in the system

The clever solution allows the job site application in 230 voltage and 400 voltage. Use the advantages of both models and increase your machine utilization. Through the easily switch over the pump outlet could adapted without a pump change.




TECHNICAL DATA


Part no.	00 26 06 21
Working pressure	max. 25 bar
Conveying capacity	max. 20 l/min
Conveying distance	up to 50 m
Motor	230/400 V, 1/3 Ph, 50 Hz, 5.5 kW, 400 rpm
Hopper content	145 litre
Connection cable	RED 5-32 A BLU 2-16 A - 1 m
Rotor / Stator	SD 6-3 slimline
Spraying gun	DN25-360° S14 200 Geka
Air compressor	COMP P-200, 230 V, 1 Ph, 50 Hz, 0.5 kW, 200 l/min
Material outflow	DN35 female part DN25 male part
Material hose	RONDO DN25 - 10 m
Water pump	AVO 500 230 V, 1 Ph, 50 Hz, 0.37 kW
Dimensions: L/W/H	1,200/720/1,530 mm
Filling height	910 mm
Total weight	~290 kg

Kindly note:

Conveying distance depends on the used materials.



ADVANTAGES AT A GLANCE

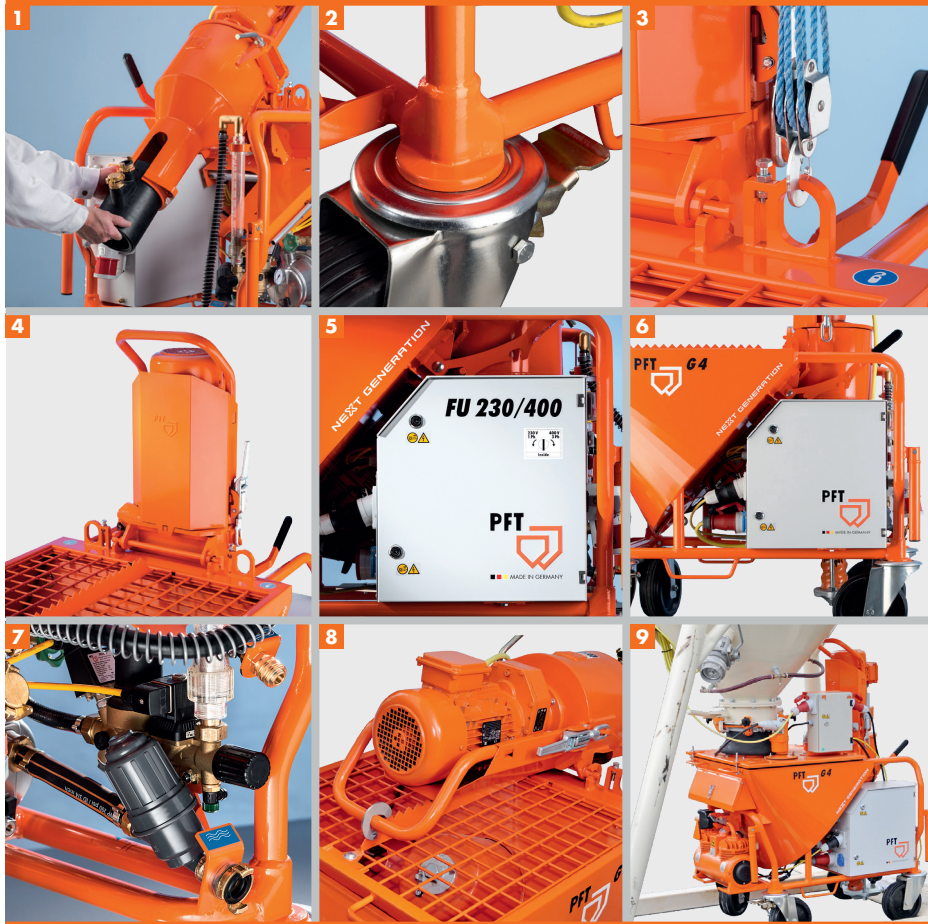

- 1** Easy cleaning – rubber mixing zone with adapter flange for D and R pump
- 2** Reinforced tubular frame and robust wheel mounts
- 3** Forklift straps and crane lifting eyes
- 4** Deflector – reduction of the dust exposure
- 5** Large control cabinet – maintenance-friendly and protective cover
- 6** Switches and connectors are in the inner contour of the frame
- 7** Large water fine filter
- 8** Practically transport safety for the mixing tube, reduce the high of the machine
- 9** Easy, fast and efficient – the filling of the machine with material:
 - Direct filling from silo by using the delivery hood
 - Filling with bagged cargo
 - Pneumatic filling from silo by using conveying equipment PFT SILOMAT
- Flexible mixing intensity thanks to two water inlets
- Frequency converter (FC) for infinitely variable speed control
- Safety transport through four grips with folding-mechanism
- Maintenance-friendly – water fitting and pressure switch are easily accessible

FIELDS OF APPLICATION

- Gypsum plaster
- Lime-cement plaster
- Light plaster
- Adhesive and reinforcement mortar
- Grouting mortar
- Scratch coat
- Floor screed
- Loam plaster
- Masonry mortar
- Finishing coat
- Insulation material
- Fire protection mortar
- Floor levelling compound

ACCESSORIES

- | | |
|--|-------------|
| ■ Extension cable 5 x 4 mm ² , RED 5-32 A – 50 m | 20 42 39 00 |
| ■ Anti-dust-unit | 00 43 24 13 |
| ■ Injection hood including level sensor and extension for remote control cable | 20 60 02 13 |
| ■ Delivery hood | 20 60 05 00 |
| ■ ZARGOMAT pro DN25-360° | 00 42 00 58 |
| ■ JETSET pro DN25 Ewo | 00 41 89 75 |



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpft

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT G 4 FC-230/400V – EN/04.19/PFT