

# PFT SWING L FC-230V airless

The high-pressure pump with RotaAirless technology

Due to its various fields of application, e.g. spraying, filling, bonding and reinforcing, the powerful one ensures a high machine capacity utilization and is therefore an ideal supplement to the machine park.



**THE SWING-EFFECT**

**PFT SWING AIRLESS**

More quiet!

More robust!


More economical!

## TECHNICAL DATA

Part no.	00 45 13 36
Maximum working pressure	140 bar
Maximum conveying capacity	continuously adjustable output up to 6.5 l/min
Maximum conveying distance	up to 30 m
Motor	230 V, 1 Ph, 50 Hz, 3 kW, 0 - 280 rpm
Hopper content	70 litre
Connection cable	BLU 2-16 A - 5 m
Rotor/Stator	306 airless
Spraying gun	In Line Texspray
Spraying cap	RAC X 541
Material outflow	DN12 female   1/2" external thread
Material hose	RONDO airless DN12 - 20 m
Dimensions: L/W/H	1,430 / 500 / 720 mm
Filling height	700 mm
Total weight	~ 100 kg

### Kindly note:

Conveying distance depends on the used materials.

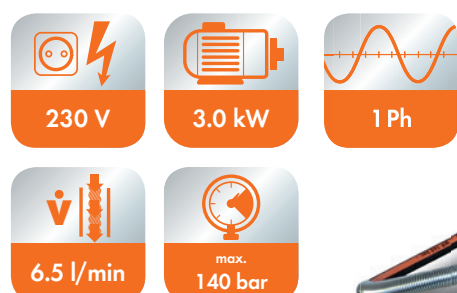

ROTA AIRLESS



**PFT – ALWAYS AT YOUR SITE**

## ADVANTAGES AT A GLANCE

		<ul style="list-style-type: none"> <li><b>1</b> Material hopper one-piece, no back taper Reduced material adhesion – quick and easy cleaning</li> <li><b>2</b> Protective grid, low-lying</li> <li><b>3</b> Quick pump replacement on construction site</li> <li><b>4</b> Controls – clearly arranged and easily accessible</li> <li><b>5</b> Tube bracket, integrated</li> <li><b>6</b> Material filter</li> <li><b>7</b> Puncture proof wheels</li> <li><b>8</b> Pump, valveless – RotaAirless technology: Improved spray quality due to an additional kneading effect in the pump</li> <li><b>9</b> Pressure control via digital display</li> <li><b>10</b> Idling protection – extends the lifetime of the pump</li> <li><b>11</b> Conveying distance up to 30 metre – flexible hose with kink protection on machine outlet</li> <li><b>12</b> Various fields of application: spray plaster, grainy material up to 3 mm, colour*</li> <li><b>13</b> Low noise, compact and powerful</li> <li><b>14</b> Easy handling on construction site</li> <li><b>15</b> Robustly designed and suitable for construction site</li> </ul> <p><small>* Please consider approval of colours. Do not use with solvent-containing colours.</small></p>
		
		
		

### FIELDS OF APPLICATION

- Spray plaster
- Grainy material up to 3 mm\*
- Colour\*\*

\*Not with Stator 306 airless  
\*\*Please consider approval of colours. Do not use with solvent-containing colours.



### ACCESSORIES

- Bag squeezer
- Conversion kit – for air-assisted spraying of spray plaster
- Conversion kit – grainy material
- Conversion kit – colour
- CEE current manifold 400 V  
RED 5-16 A | 3 x BLU 2-16 A

### PART NO.

00 45 98 11  
00 50 43 44  
  
00 51 85 42  
00 50 37 59  
00 49 51 47



### The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

[www.pft.net](http://www.pft.net)  
[www.youtube.com/knaufpft](http://www.youtube.com/knaufpft)

Download now! APP: PFT – Plastering Technology

### Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net [www.pft.net](http://www.pft.net)

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photo-mechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT SWING airless FC-230V – EN/03.20/PFT