

# PFT SWING L FC-400 V airless

## The high-pressure pump for viscous and pasty material


With little effort the high-pressure pump can be changed into a feed pump by switching the screw pump. By this means, a grading of 6 mm, e.g. reinforcing mortar or finishing coat, can be optimally used.



### TECHNICAL DATA

Part no.	00 53 14 53
Maximum working pressure	140 bar
Maximum conveying capacity	continuously adjustable output up to 8.5 l/min
Maximum conveying distance	up to 40 m
Motor	400 V, 3 Ph, 50 Hz, 4 kW, 0 - 320 rpm
Hopper content	70 litre
Connection cable	RED 5-32 A
Rotor / Stator	306 airless
Spraying gun	In Line Texspray
Spraying cap	RAC X 541
Material outflow	DN12 female   1/2" external thread
Material hose	2x RONDO airless DN12 - 20 m incl. adapter for hose extension
Dimensions: L/W/H	1,430 / 500 / 720 mm
Filling height	720 mm
Total weight	~ 110 kg

**Kindly note:**  
Conveying distance depends on the used materials.

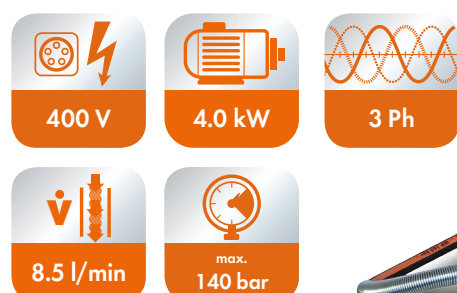

RQTA AIRLESS



**PFT – ALWAYS AT YOUR SITE**

## ADVANTAGES AT A GLANCE

		<ul style="list-style-type: none"> <li><b>1</b> Material hopper one-piece, no back taper Reduced material adhesion – quick and easy cleaning</li> <li><b>2</b> Protective grid, low-lying</li> <li><b>3</b> Quick pump replacement on construction site</li> <li><b>4</b> Controls – clearly arranged and easily accessible</li> <li><b>5</b> Tube bracket, integrated</li> <li><b>6</b> Material filter</li> <li><b>7</b> Puncture proof wheels</li> <li><b>8</b> Pump, valveless – RotaAirless technology: Improved spray quality due to an additional kneading effect in the pump</li> <li><b>9</b> Pressure control via digital display</li> <li><b>10</b> Idling protection – extends the lifetime of the pump</li> <li><b>11</b> Conveying distance up to 40 metre – flexible hose with kink protection on machine outlet</li> <li><b>12</b> Various fields of application: spray plaster, grainy material up to 3 mm, colour*</li> <li><b>13</b> Low noise, compact and powerful</li> <li><b>14</b> Easy handling on construction site</li> <li><b>15</b> Robustly designed and suitable for construction site</li> </ul> <p><small>* Please consider approval of colours. Do not use with solvent-containing colours.</small></p>
		
		
		
		
		

### FIELDS OF APPLICATION

- Spray plaster
- Grainy material up to 3 mm\*
- Colour\*\*

\*Not with Stator 306 airless  
\*\*Please consider approval of colours. Do not use with solvent-containing colours.



### ACCESSORIES

- Extension cable 5 x 2.5 mm<sup>2</sup>  
RED 5-16 A - 25 m
- Bag squeezer
- Conversion kit – for air-assisted spraying of spray plaster
- Conversion kit – D pump
- Conversion kit – colour

### PART NO.

20 42 33 60  
00 45 98 11  
00 50 43 44  
00 53 80 76  
00 50 37 59



### The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

[www.pft.net](http://www.pft.net)  
[www.youtube.com/knaufpft](http://www.youtube.com/knaufpft)

Download now! APP: PFT – Plastering Technology

### Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net [www.pft.net](http://www.pft.net)

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT SWING airless FC-400V – EN/06.19/PFT