

# PFT RITMO XL

## The powerful mixing pump for plastering


Compact and handy mixing pump with three-phase drive. Specially developed for pumping, spraying and applying ready-mixed dry mortars, pasty materials and much more.



### TECHNICAL DATA


|                    |  |
|--------------------|--|
| Part no.           | 00 18 64 78  |
| Working pressure   | 30 bar   |
| Conveying capacity | 20 litres / min                                    |
| Conveying distance | up to 50 m   |
| Motor              | 400 V, 3 Ph, 50 Hz, 5.5 kW, 400 rpm                |
| Hopper content     | 70 litres  |
| Rotor/Stator       | TWISTER D 6-3                                      |
| Spraying gun       | DN25-360° S14 200 Geka                             |
| Air compressor     | COMP M-250, 400 V, 3 Ph, 50 Hz, 0.9 kW - 250 l/min |
| Material outflow   | DN25 male part                                     |
| Material hose      | RONDO DN25 - 10 m                                  |
| Dimensions: L/W/H  | 1,300/700/1,400 mm                                 |
| Filling height     | 850 - 1,010 mm                                     |
| Weight             | ~ 224 kg   |

**Kindly note:**  
All details depends on the used materials.




# ADVANTAGES AT A GLANCE


**1**





**2**

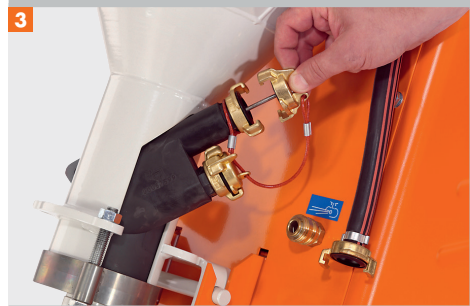


**3**









**1** Suitable for buckets and bags

**2** Rubber mixing tube for easy cleaning with changeable flange for D and R pumps

**3** Flexible mixing intensity thanks to two water inlets

Conical mixing tube for optimum material flow

Ready for remote control cable

Integrated water pump AV 700 as water pressure booster pump

Easy, compact and rollable

Variable filling height

Easy dismountable into three modules

## FIELDS OF APPLICATION

- Premixed gypsum plaster
- Lime gypsum plaster
- Cement plaster
- Masonry mortar
- Reinforcing / adhesive mortar
- Insulation plaster
- Floor screed



## ACCESSORIES

- Extension cable 3 x 2.5 mm<sup>2</sup>, BLU 2-16 A - 25 m
- ZARGOMAT pro DN25-360°
- JETSET pro DN25 Ewo
- Spraying set for finishing coats in case
- Extension hopper - 140 litres
- Cover for RITMO XL

## PART NO.

20 42 34 20

00 42 00 58

00 41 89 75

00 23 21 06

00 20 18 70

00 20 79 57



## The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

[www.pft.eu](http://www.pft.eu)  
[www.youtube.com/knaufpft](http://www.youtube.com/knaufpft)

Download now! APP: PFT - Plastering Technology

## Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

[info@pft-iphofen.de](mailto:info@pft-iphofen.de) [www.pft.eu](http://www.pft.eu)

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT RITMO XL - GB/11.16/PFT