


CONTRAPANEL GLOBE - PERFORERINGSDATA


PERFORERINGSDETALJER

Perforeringstype	Globe - 6 mm runde huller
Perforeringsprocent	10,2 %
Perforeringsmønster	G1F

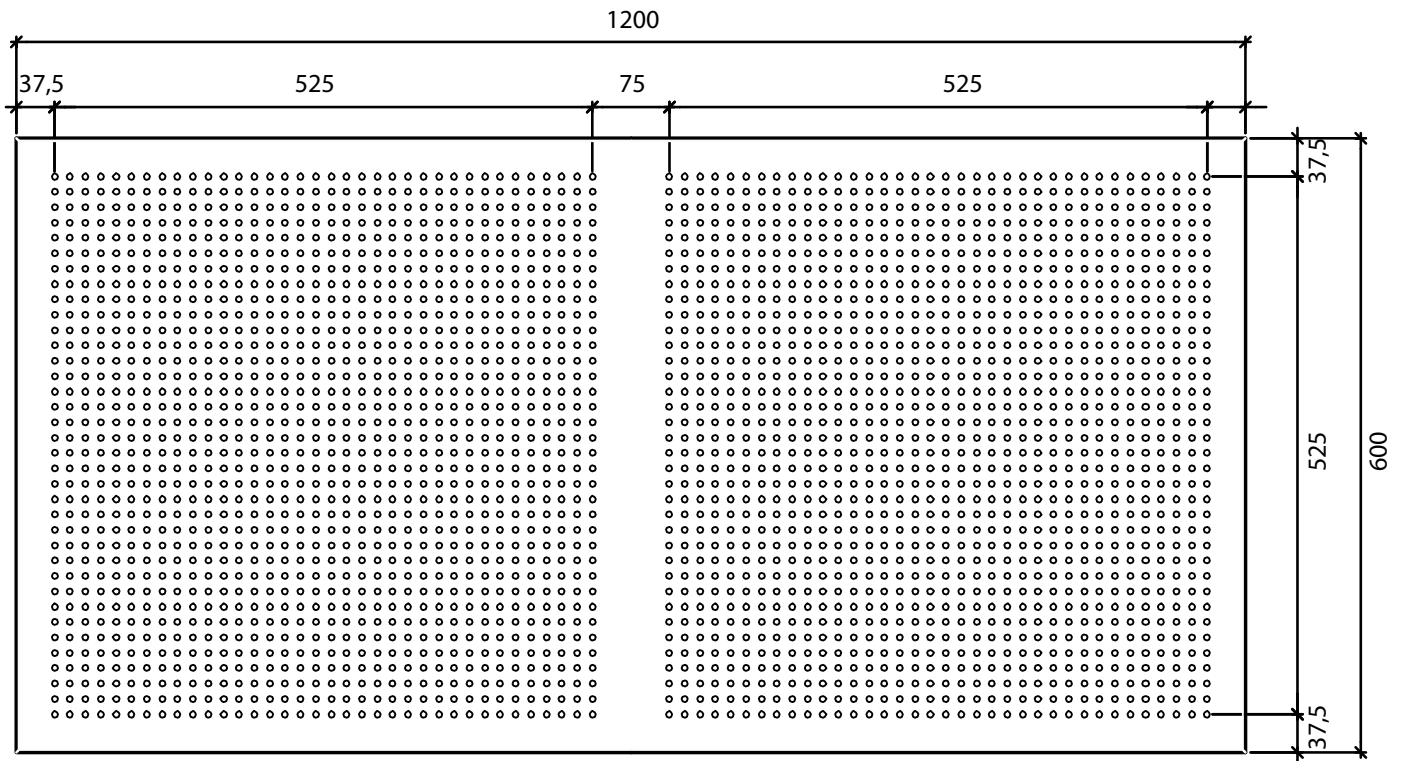

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,45	0,65	0,80	0,65	0,55	0,45

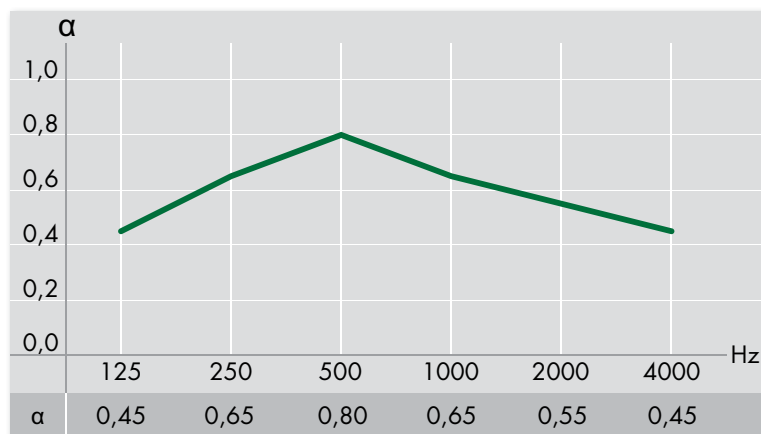

Ved 200 mm og med 0 mm mineraluld