


CORRIDOR SWING GLOBE - PERFORERINGSDATA


PERFORERINGSDETAJLER

Perforeringstype	Globe - 6 mm runde huller
Perforeringsprocent	10 %
Perforeringsmønster	G1

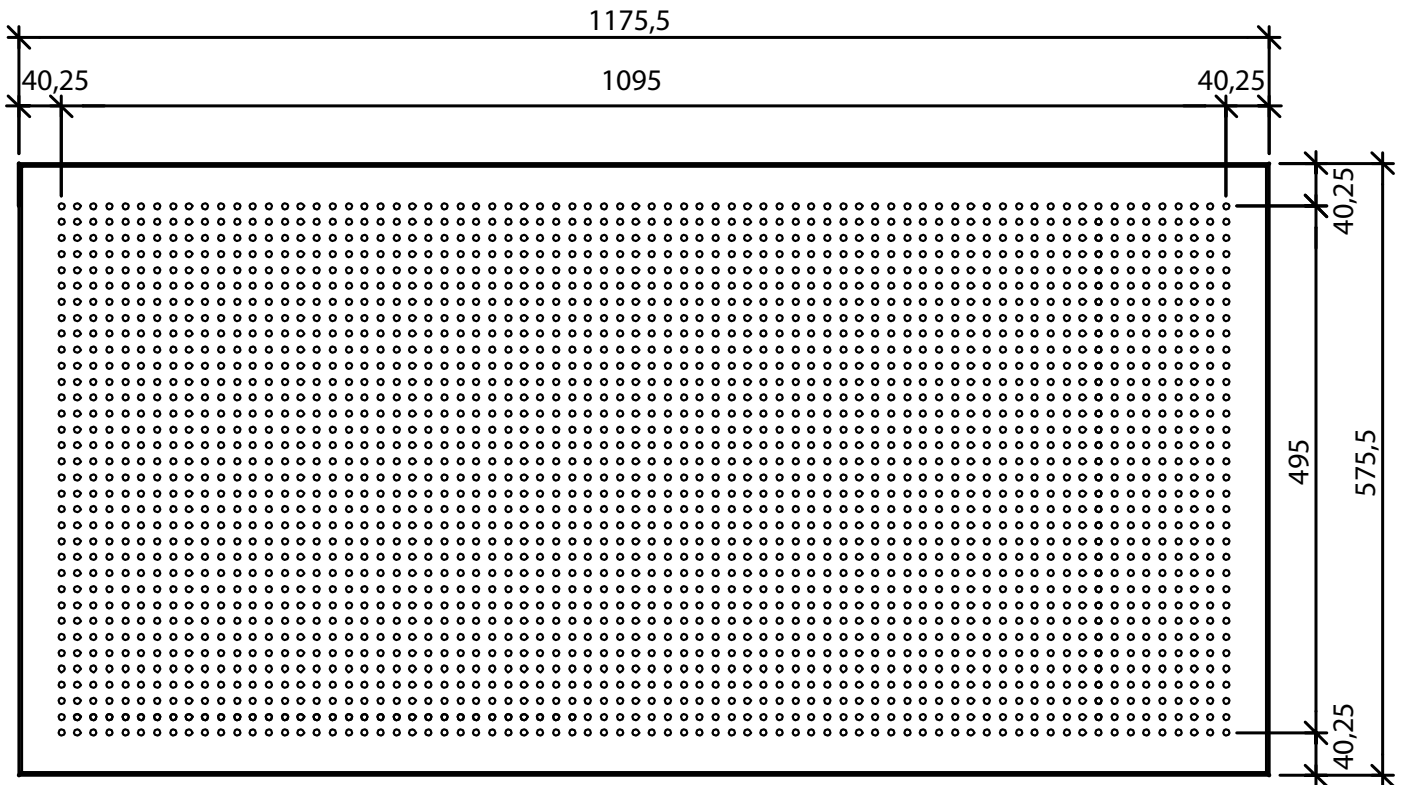

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,75	0,75	0,60	0,60	0,55

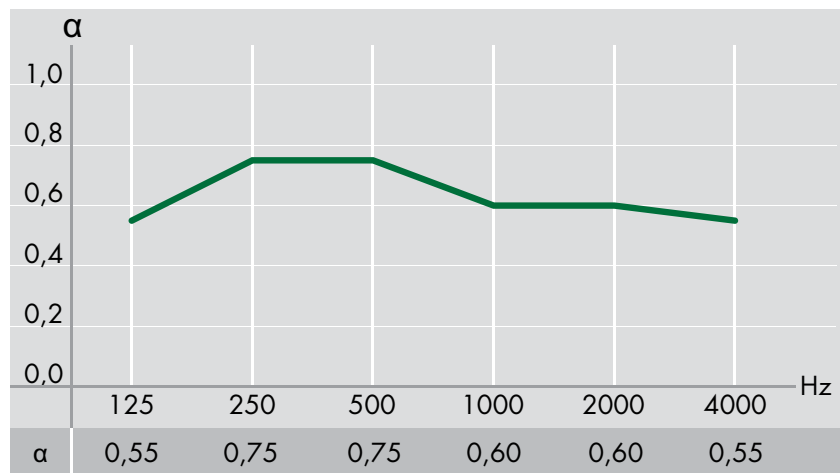


Ved 200 mm og med 50 mm mineraluld

CORRIDOR SWING MICRO - PERFORERINGSDATA


PERFORERINGSDETALJER

Perforeringstype	Micro - 3x3 mm kvadratiske huller
Perforeringsprocent	9,9 %
Perforeringsmønster	M1

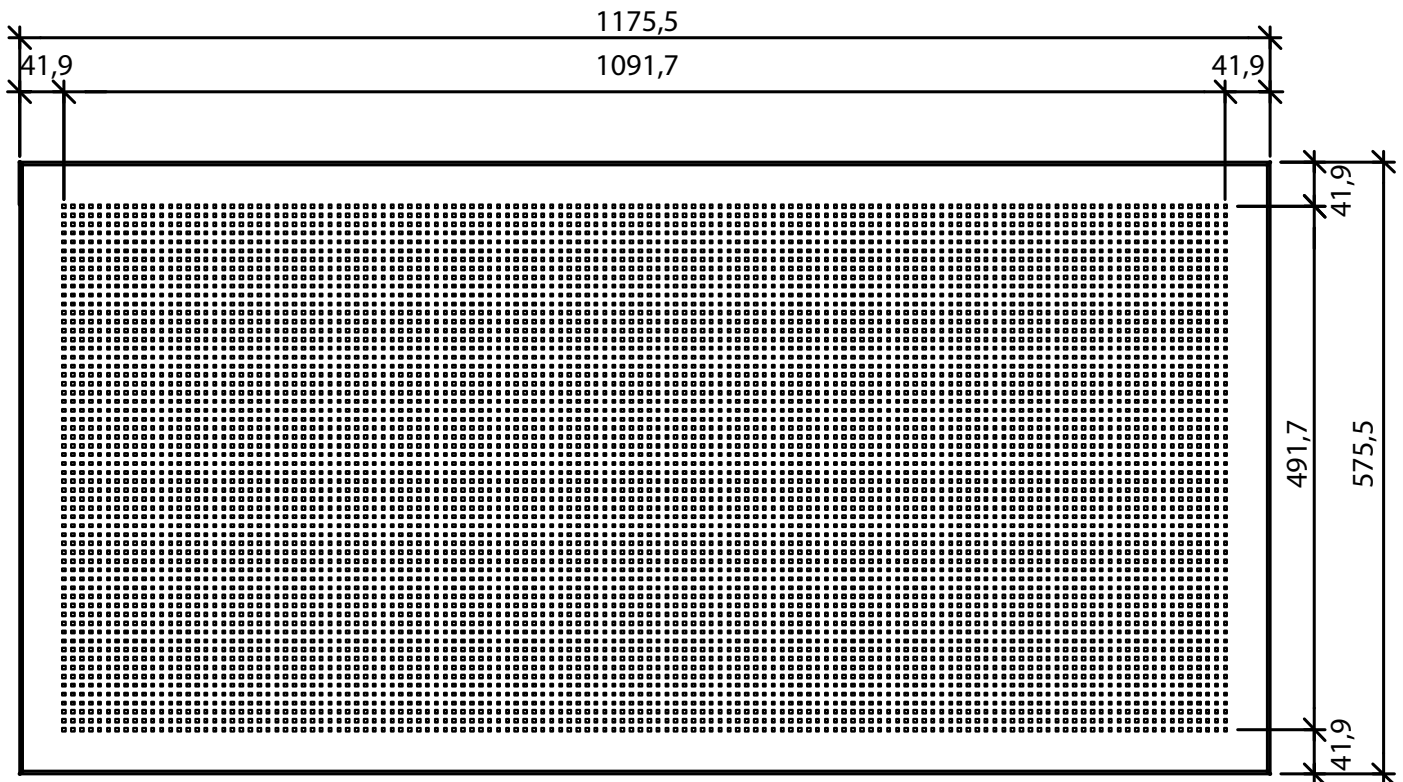

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,45	0,70	0,70	0,70	0,70	0,70

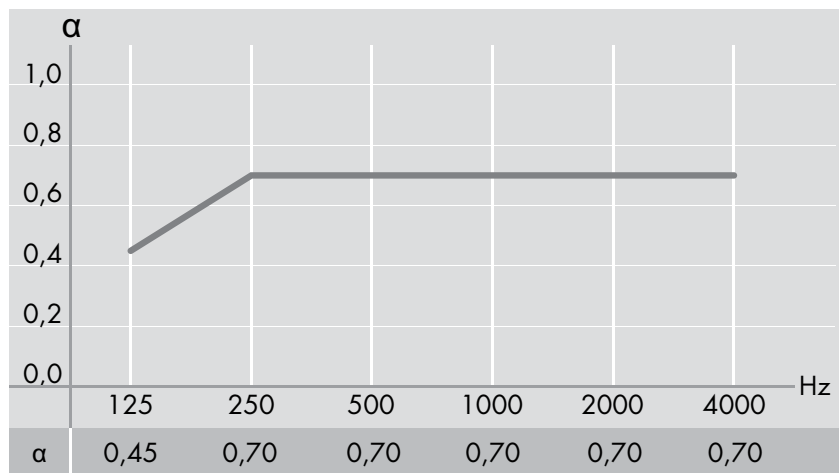


Ved 200 mm og med 50 mm mineraluld

CORRIDOR SWING QUADRIL - PERFORERINGSDATA


PERFORERINGSDETALJER

Perforeringstype	Quadril - 12x12 mm kvadratiske huller
Perforeringsprocent	11,5 %
Perforeringsmønster	Q1

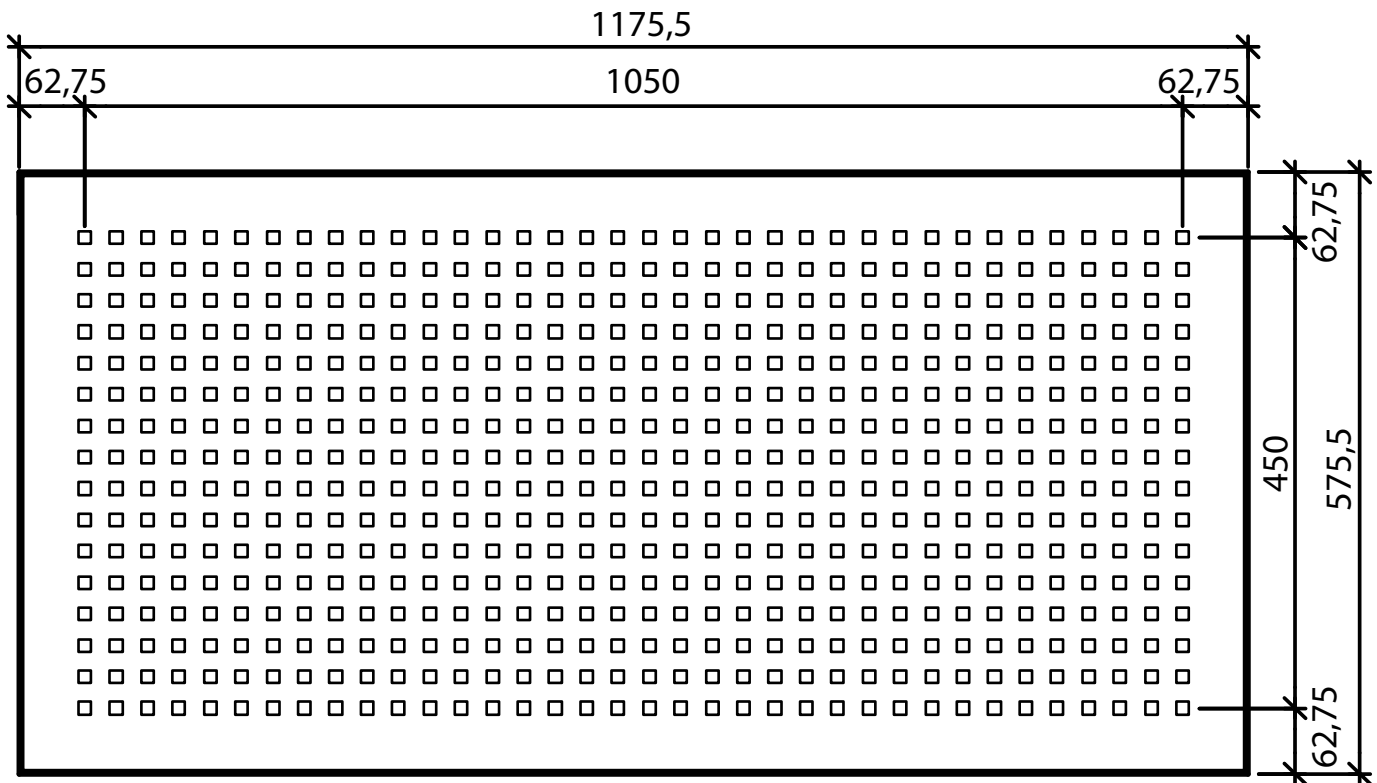

ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,75	0,80	0,65	0,65	0,55

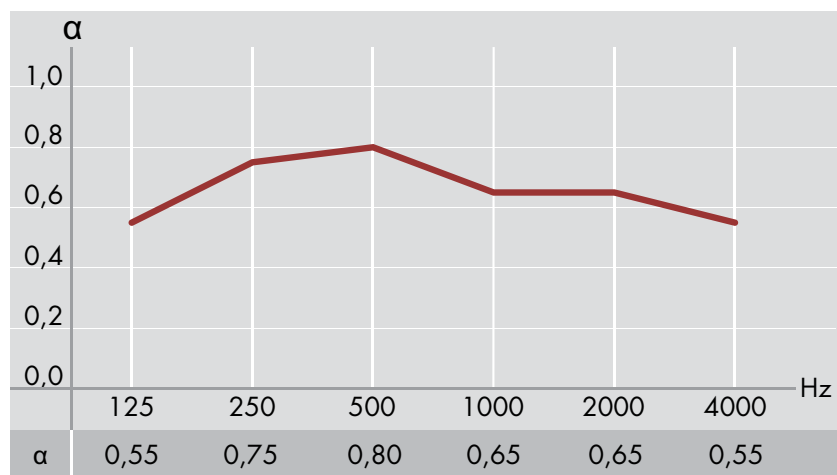

Ved 200 mm og med 50 mm mineraluld