

PFT DUSTCATCHER G 4

Dust free - work clean and health-friendly

The dust formation during the loading of bagged goods cannot be completely prevented, but we can significantly reduce it. This is because the health of the processor is our priority.

TECHNICAL INFORMATION / DATA

Part no.	00 53 97 16
Dimensions: W / L	725 mm / 665 mm
Opening dimension: W / L	330 mm / 400 mm
Weight of hood	16.1 kg
Weight of deflector plate	2.3 kg
Connection vacuum cleaner	Internal diameter 37 mm
Power input	maximum 1,400 Watt
Hopper content for dust	25 litres

Dust remover: Category M - iPulse

Reduction efficiencies of filter system > 99.9%

Suitability for hazardous dust with
limit values² > 0.1 mg / m³

Scope of supply

- Dust remover, category M- iPulse¹
- Supplementary set of dust remover
comprises: 1x handhold, 2x suction tube,
1x joint nozzle, 1x dust nozzle
- Hopper extension DUSTCATCHER
- Deflector plate G 4 with outlet connections

¹ Source: EN 60335-2-69 and IEC 60335-2-69 Annex AA


² The corresponding national specifications must be taken into
consideration for the limiting values e.g. the TRGS 900 in Germany.

* up to 80% less dust



PFT – ALWAYS AT YOUR SITE

ADVANTAGES AT A GLANCE

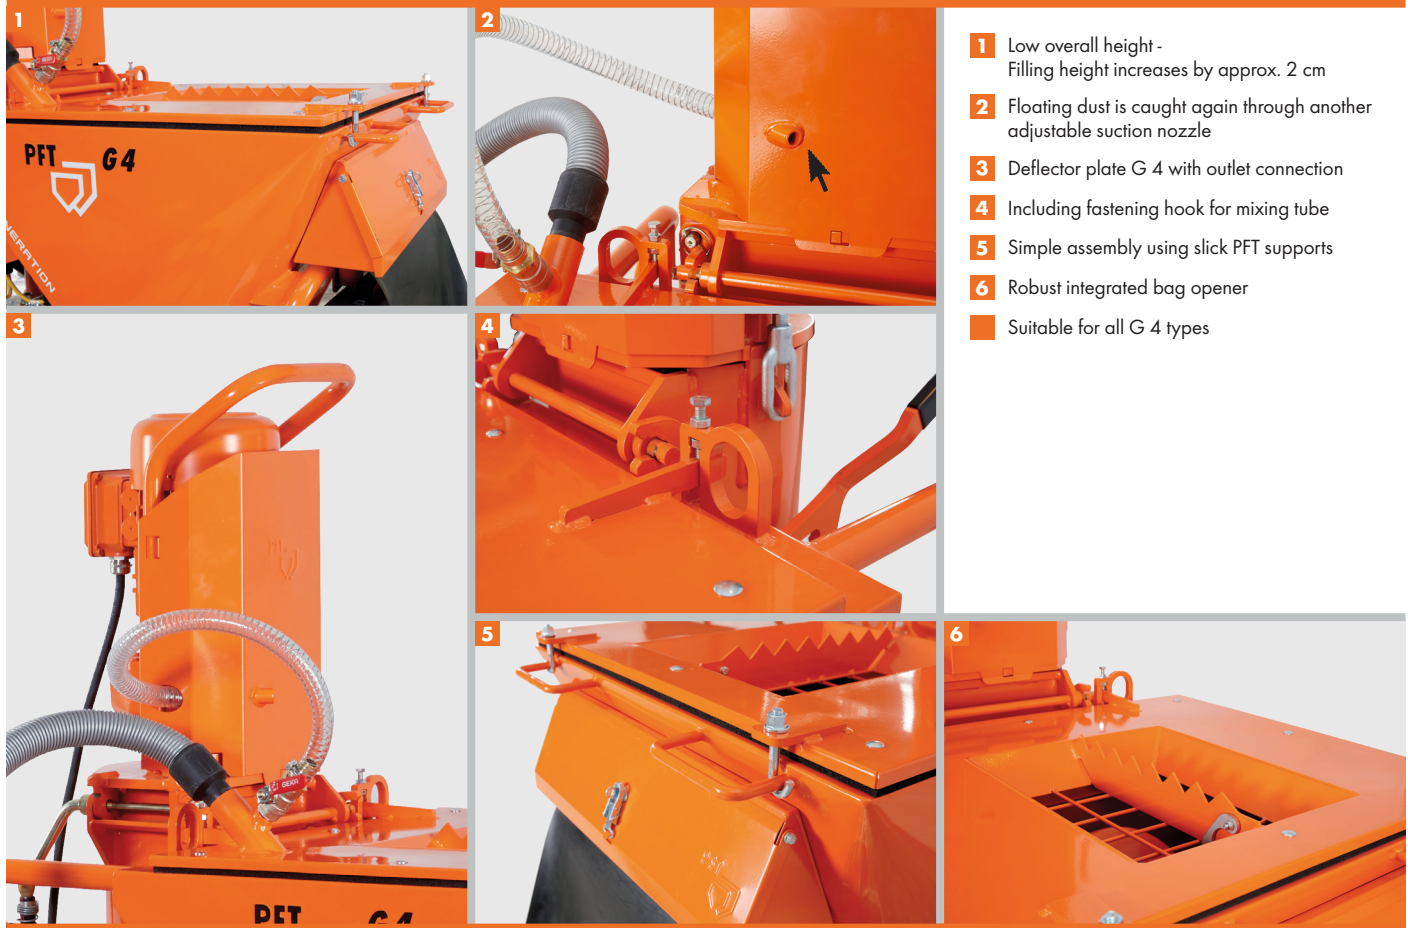

- 1** Low overall height -
Filling height increases by approx. 2 cm
- 2** Floating dust is caught again through another
adjustable suction nozzle
- 3** Deflector plate G 4 with outlet connection
- 4** Including fastening hook for mixing tube
- 5** Simple assembly using slick PFT supports
- 6** Robust integrated bag opener
- 7** Suitable for all G 4 types

SCOPE OF SUPPLY

- Dust remover, category M - iPulse¹
- Supplementary set of dust remover M - iPulse
comprises:
1x handhold, 2x suction tube, 1x joint nozzle, 1x dust nozzle
- Deflector plate G 4 with outlet connection
- Extension hopper DUSTCATCHER

¹ Source: EN 60335-2-69 and IEC 60335-2-69 Annex AA

PART NO.

00 62 32 76
00 42 68 94
00 53 84 45
00 53 84 16



The PFT service guarantee

Customer service, technical competence and Service orientation. PFT stands and will stand for these values along with its sales and service centres all over the world even in the coming decades.



Click. Discover. Experience.

www.pft.net/dustcatcher
www.youtube.com/knaufpft

Download now: APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights and technical changes are reserved. Our guarantee only relates to the perfect quality of our machines. Consumption, quantity, execution details and performance data are empirical values, which cannot be transferred readily in case of different circumstances. Furthermore, the guidelines of the material manufacturer are always applicable. Changes, reprints and photo-mechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT DUSTCATCHER G 4 – EN/06.19/PFT